

FRESH 35/65

Air supply unit for window mounting • 2004-01-01



- Easy to regulate
- Easy to assemble

Fresh 35/65

Window mounted vents designed for protruding windows.

The internal part is positioned over a row of holes or a slot in the frame/arch.

An external grille is mounted outside to prevent water penetration.



Specification

Product	Description	Art no
Fresh 35/A bulk	Complete with internal part and external grille	350031
Fresh 35/B bulk	Complete with internal part and external grille	350021
Fresh 35/A internal part	Internal part	350041
Fresh 35/B internal part	Internal part	350051
Fresh 65/A bulk	Complete with internal part and external grille	650031
Fresh 65/B bulk	Complete with internal part and external grille	650021
Fresh 65/A internal part	Internal part	650041
Fresh 65/B internal part	Internal part	650051

Type A = For mounting in recessed slot (industrial mounting)

Type B = For mounting over a row of holes

The vents are also available in other colours, for further information please contact Fresh AB.

Technical data

Product	Fresh 35	Fresh 65
Capacity at 10 Pa slot:	6,3 l/s	15 l/s
Capacity at 10 Pa row of holes:	5,2 l/s	12 l/s
Wall opening slot: (mm)	330 x 12	454 x 16
Wall opening row of holes: (mm)	23 x Ø12	22 x Ø16
Material:	ABS plastic (recyclable)	ABS plastic (recyclable)
Colour:	White, NCS S0502-Y	White, NCS S0502-Y

FRESH 35/65

Air supply unit for window mounting • 2004-01-01

Fresh 35/65

Window mounted vents for protruding windows. The internal part is positioned over a row of holes or a slot in the frame/arch. A complete vent include internal part and external grille (incl built-in mesh). A drill-pattern is available as accessory (aligns the drill and provides correct distance between holes).

Internal part

The internal part is equipped with a regulator with which the opening is adjusted. The regulator is available in two different models, type A for mounting in recessed slots (industrial mounting) and type B for mounting in row of holes (see illustrations). The vents have a favourable distribution pattern as they distribute the air both up and downwards.


Type A

for slot mounting




Type B

for row of holes

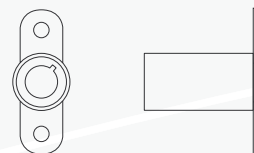

Capacity

— Row of holes
- - - Slot

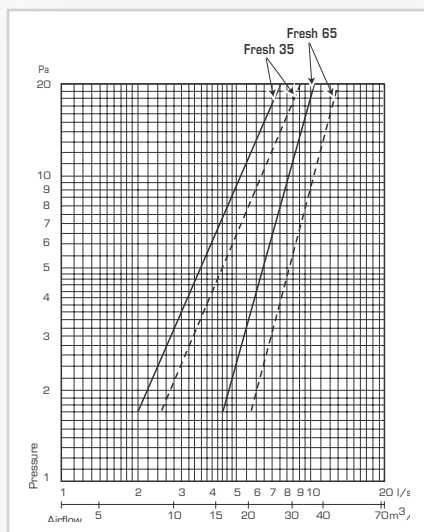

Accessories



Drill pattern, aligns the drill and provides correct distance between holes



Channel 33, intended for hole profiles in plastic and aluminium windows.



Flat grille FG, used as external grille when mounted on special constructions (363 x 29mm)



Vertical grille VG, used as external grille when mounted vertically (368 x 22mm)

Technical data Fresh 35


Capacity at 10 Pa:	Slot 6,3 l/s Row of holes 5,2 l/s
Wall opening:	Slot 330 x 12 mm Row of holes 23 x Ø12 mm
Material:	ABS plastic (recyclable)

Technical data Fresh 65

Capacity at 10 Pa:	Slot 15 l/s Row of holes 12 l/s
Wall opening:	Slot 454 x 16 mm Row of holes 22 x Ø16 mm
Material:	ABS plastic (recyclable)

Measurement Fresh 35/65

	A	B	C	D	E	F
Fresh 35	345	31	16	363	23	21
Fresh 65	475	36	22	505	30	30

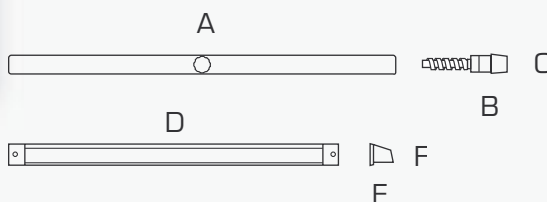

FRESH AB
Box 7
SE-360 32 GEMLA
www.fresh.se

Telephone +46 (0)470 70 77 00
Fax +46 (0)470 70 77 39

E-post information@fresh.se